




## Instruction manual Lightswing® Zero

### What you need




Screwdriver




Pencil



Drill or screwdriver

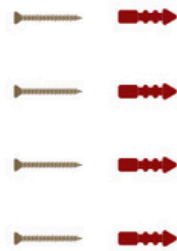

Screws and plugs. **(not included)**. We recommend 4 universal cylinder-head screws of 4/4.55 mm.

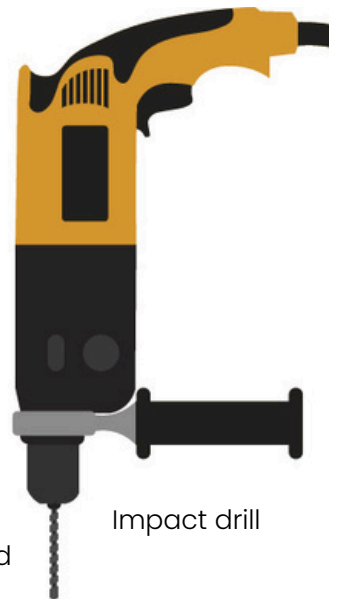

Impact drill

## Introduction

As of today, you can effortlessly turn your pendant light 360°. With the help of this manual, we will walk you through this 7 easy installation steps.

## Important before you get started

- ✓ The Lightswing® is delivered complete and pre-assembled
- ✓ The Lightswing® is a high-quality product that requires no maintenance
- ✓ The warranty period is two years, as defined in our terms and conditions ([www.lightswing.eu/terms-and-conditions](http://www.lightswing.eu/terms-and-conditions))

## Technical specifications

Turn range	360°
Suitable for a dimmer	Yes
Suitable for a LED-driver or transformer	Yes
Suitable for damp places	Yes
Including light source	No
Distance between sliding nuts	3.5 – 8 cm
Maximum weight pendant light	10 kg
Dimensions	17.5 x 1.7 cm
Weight Lightswing® Zero	0.4 kg

## In your package




Lightswing® Zero



Screws (for step 6)



Drill bit (for step 4)

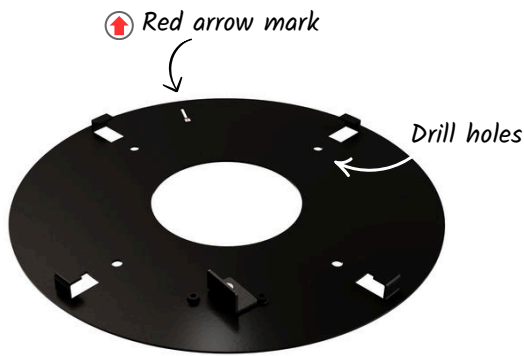

**Base plate**



**Cover**

### Step 1

Remove the screw on the side of the cover. Hold the cover and rotate the base plate to the left to release it.

### Step 2

- Mark the drill holes on the ceiling. Use the round, pre-drilled holes of the base plate.
- Note:** If you install the Lightswing® Zero in a random location and the cable comes from the side, make sure the red arrow on the base plate aligns with the cable.
- Drill the marked holes with a 4 mm drill and insert plugs.

### Step 3

Secure the base plate with 4 universal cylinder-head screws of 4/4.55 mm.

**Note:** Installing the Lightswing® Zero over an electrical junction box or electrical cable? First thread the cables through the center hole.

### Step 4

Check if the bracket from your pendant light fits on the Lightswing® Zero. Position the holes in the bracket of your pendant light over the holes from the sliding nuts. Does the bracket fit?

**YES:** proceed to step 5.

**NO:** mark the furthest position of the sliding nuts on the bracket and drill the holes, using the provided drill bit.

### Step 5

- Attach the cover to the base plate.
- Note:** Installing the Lightswing® Zero in a random location: push out the cutout, indicated on the cover with red arrow. Insert the cable here.
- First thread the cables through the center hole. Slide the yellow cover blocks onto the base plate hooks, turn it right to lock, and reinsert the screw.

### Step 6

Screw the bracket of your pendant light on the sliding nuts of the Lightswing® Zero, using the included screws.

### Step 7

Follow the mounting instructions of your pendant light.